



P# 800.872.4886 or 603.742.7095

F# 603.742.9938

## C-56™ Thermal Receipt Printer

The ideal solution for low-cost receipt printing!




### Perfect for receipting!

- **Economically priced**
- **High speed USB and RS232 serial interface**
- **Prints up to 220 mm/second**
- **Paper width of 58-60 mm**
- **Patented tear bar design prevents vandalism**

The Telpar C-56 Thermal Receipt Printer is the ideal printer for receipt printing. Handling a paper width of 58-60 mm, the Telpar C-56 with USB interface prints at speeds up to 220 mm/second (8.6 inches/second)! A unique, patented tear bar assembly prevents vandals from pulling all of the paper out of the printer; it tears off, if this is attempted. The design includes an integral chute that protrudes from the front of your panel, making mounting and integration simple. The Telpar C-56 printer will pull a 4 inch diameter paper roll from its integral paper tray to provide extended operation between refills. A single sensor detects %out of paper+and %paper low+. The Telpar C-56 printer is one of the most cost-effective receipting solutions you've ever encountered!

**Have a receipt printer need? Let Telpar and the C-56 handle it for you!**

# Telpar C-56™ Thermal Receipt Printer

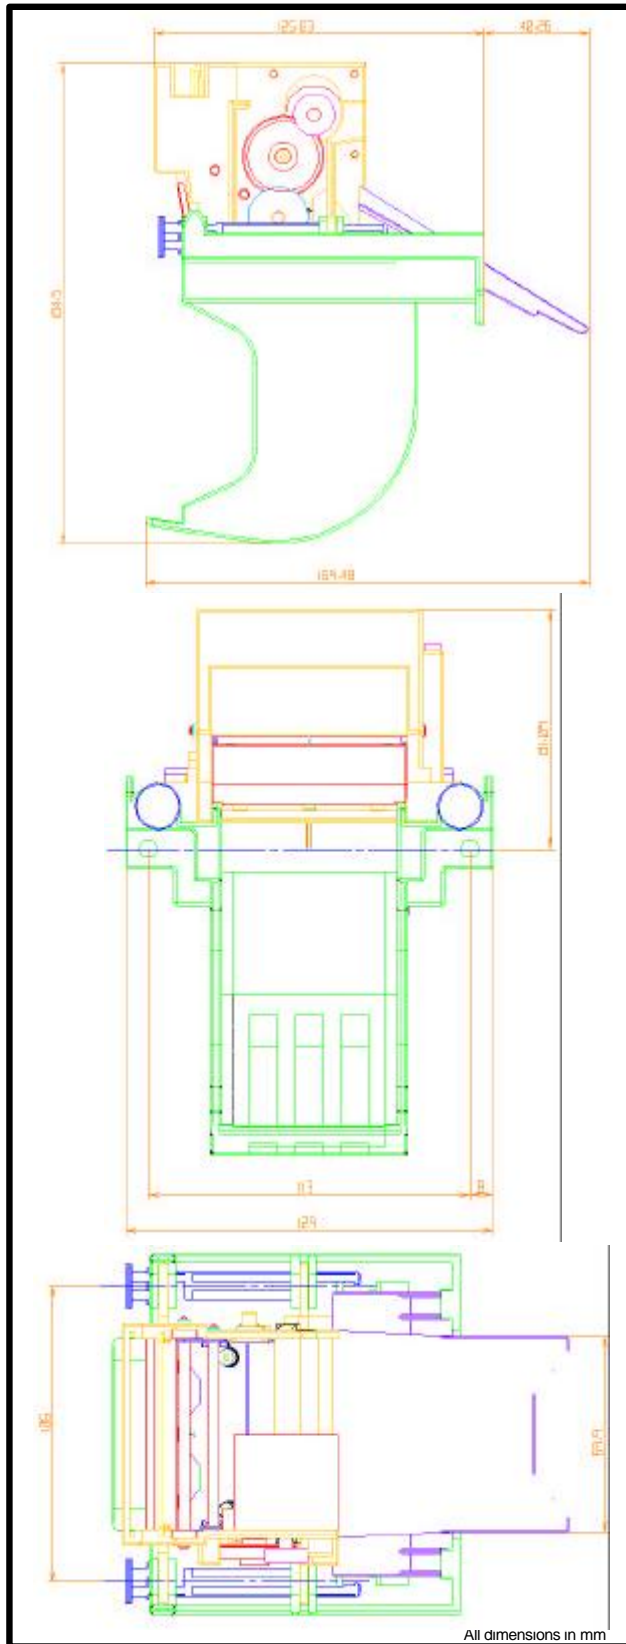

## Specifications

**Technology:** Direct Thermal  
**Print Speed:** Up to 8.6 ips (220 mm/sec)  
**Resolution:** 203 dpi (8 dots/mm)  
**Total No. Dots:** 448

### Printhead Life

*Abrasion (based on 12.5% print density)* 100 km of paper

*Electrical:* 100 million dot pulses

**Graphic Driver:** Windows® 2000/XP, Linux

### Bar Codes:

*Internally Generated:* UPC-A, UPC-E, EAN-13, EAN-8, Code 39, Interleaved 2 of 5, Code 128, Codabar

*Externally Generated:* Any, generated by Windows® standard GDI file by host

**Paper Width:** 2.28 to 2.36 inches (58-60 mm)

**Printable Width:** 2.20 inches (56 mm)

**Paper Weight:** 50 to 60 g/m<sup>2</sup>

**Paper Capacity:** 4 inch (100 mm) roll diameter

**Interface Type:** USB 1.1

**Operating Voltage:** 24 VDC± 5%

### Power Consumption:

In standby, approx. 12 VA

Typical, approx. Print speed dependent

Peak, approx. Print speed dependent

**Tear Bar Type:** Full cut/vandal resistant

**Dimensions (WxHxD):** Fits in an envelope

5.1 x 7.3 x 5.5 inches  
(130 x 186 x 139 mm)

### Temperature Range

*Operating:* -30°C to +70°C

For Guaranteed Print Quality: +5°C to +50°C

*Storage:* -40°C to +85°C

### Humidity

*Operating:* 20%-90% RH, non-condensing

For Guaranteed Print Quality: 20%-80% RH, non-condensing

*Storage:* 5%-95% RH, non-condensing

All specifications subject to change without prior notice.

®Windows is a trademark of Microsoft Corporation.



187 Crosby Road

Dover, NH 03820

P# 800.872.4886 or 603.742.7095

www.telpar.com info@telpar.com

F# 603.742.9938